




| | VM30 VM50 | VM31 VM51 | VM36 VM56 | VM38 VM58 | VM3136 VM5156 | VM3138 VM5158 | VM3638 VM5658 | VM3836 VM5856 |
|---|--|--------------|--------------|--------------|------------------|------------------|------------------|------------------|
| Standard Seated Lifts | √ | - | - | - | - | - | - | - |
| Standard Wheelchair Lifts | - | √ | - | - | - | - | - | - |
| Large Wheelchair Lifts | - | - | √ | - | - | - | - | - |
| Extra Large Wheelchair Lifts | - | - | - | √ | - | - | - | - |
| Hybrid Lifts | - | - | - | - | √ | √ | √ | √ |
| 3m Maximum Travel | VM30 | VM31 | VM36 | VM38 | VM3136 | VM3138 | VM3638 | VM3836 |
| 3.5m Maximum Travel | VM50 | VM51 | VM56 | VM58 | VM5156 | VM5158 | VM5658 | VM5856 |
| Internal Width | A | 590 | 740 | 790 | 900 | 740 | 790 | 900 |
| Internal Length - Manual Door | B | 790 | 1180 | 1230 | 1400 | 1230 | 1400 | 1230 |
| Internal Length - Power Door | B | N/A | 1150 | 1200 | 1370 | 1200 | 1370 | 1200 |
| Total External Length with Door Open to Wall | C | 1655 | 2190 | 2290 | 2570 | 2235 | 2405 | 2395 |
| Total External Width Including Floating Platform | D | 722 | 872 | 922 | 1032 | 872 | 922 | 1032 |
| Total External Length Including Floating Platform to Wall | E | 1090 | 1475 | 1525 | 1695 | 1525 | 1695 | 1525 |
| Minimum Shaft Width | 846 | 996 | 1046 | 1156 | 996 | 996 | 1046 | 1156 |
| Minimum Shaft Length | 1120 | 1505 | 1555 | 1725 | 1555 | 1725 | 1725 | 1555 |
| Minimum First-Floor Ceiling Height 3m Model | 2055 | | | | | | | |
| 3.5m Model | 2295 | | | | | | | |
| Mid-Floor Dimensions | from 165 mm to 385 mm | | | | | | | |
| Safe Working Load | 250kg 300KG option for VM31,36,51,56, 3136 and 5156 models. | | | | | | | |
| Lift Speed | 60mm per second | | | | | | | |
| Ramp Gradient | 1:8 | | | | | | | |
| Car Control Illumination | 5 minutes | | | | | | | |

Dimensions listed above are for guide purposes only.



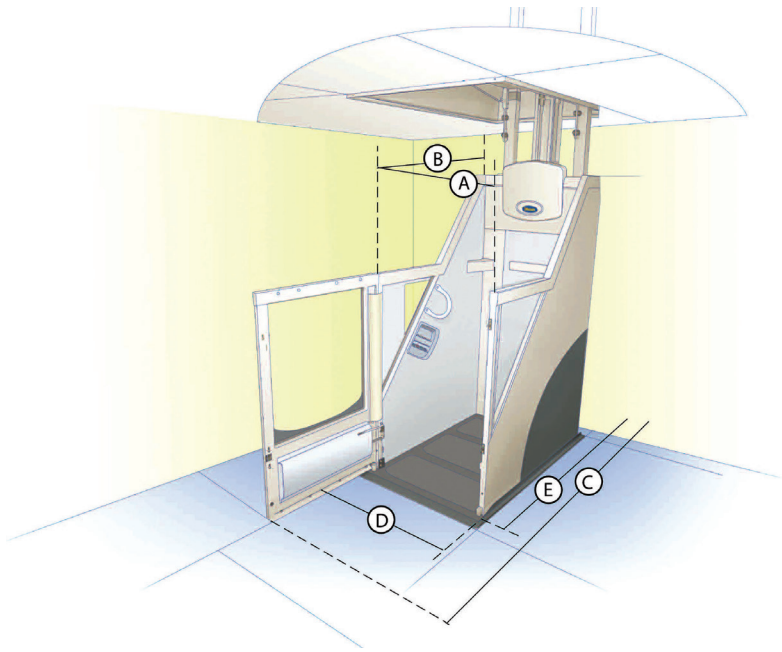

Range

The Wessex range of products offers solutions for accessibility suited to your specific requirements.

We can offer you applications suited for internal and external use, with a lifting height of up to 6m and a wide range of options to suit your individual needs.

Customer Care

Contact our dedicated, friendly team of people, experienced in offering a high level of customer care and individual attention.

Our team can offer advice on everything from feasibility to installation and after care, together with an unparalleled level of technical support.

Design Designed for safety, flexibility, total freedom and independence. Fully compliant to BS5900 : 2012.

Unobtrusive Simple and unobtrusive, the Wessex Homelift's space saving design uses the absolute minimum space in your home.

Solution The complete solution:

- Site survey by Wessex Area Sales Manager
- Completion of all electrical and building work
- Installation of lift by Wessex trained personnel
- Commission and demonstration to client
- After sales care - service and maintenance



The pump box powers our through-floor lifts. It can be placed indoors or outdoors, and being just 48.5cm tall, 23cm wide and 28cm deep. Safe working load has a chargeable 300KG option for VM31,36,51,56, 3136 and 5156 models.

Peace of Mind Wessex fully trained engineers are regionally located at five depots throughout mainland UK. For that total assurance, Wessex engineers are on call 24 hours a day, 365 days a year.

Options & Accessories An extensive range of options are available, including seats, keyswitch call stations (for added security), power operated door, in car telephone and many more.

Wessex HomeLift.




Other lifts available from the Wessex range



Wessex Lift Co. Ltd
Budds Lane, Romsey,
Hampshire, SO51 0HA

Tel: 01794 830303
Fax: 01794 514346
info@wessexlifts.co.uk

www.wessexlifts.co.uk

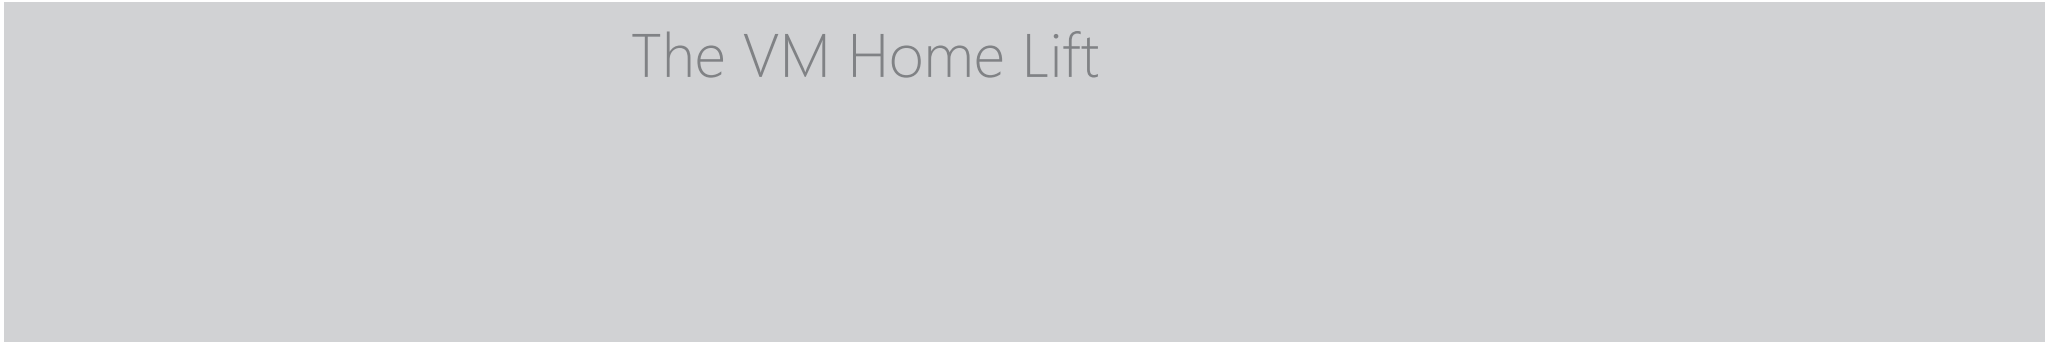

British Design & Manufacture



Ref VM00 7502
Issue N
Language UK

